


ORLOCK STAINLESS



Technical Data

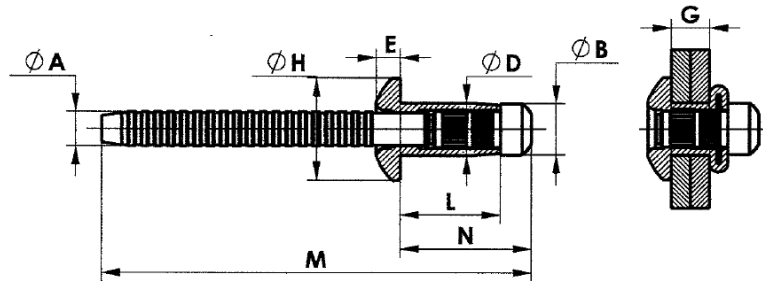

| SIZE | RIVET CODE | RIVET LENGTH L ± 0.012 | GRIP RANGE G | A DIA. ± 0.003 | B DIA. ± 0.002 | D DIA. ± 0.002 | E ± 0.012 | H DIA. ± 0.016 | M ± 0.079 | N ± 0.020 |
|-------|------------|-------------------------------|--------------|--------------------|--------------------|--------------------|---------------|--------------------|---------------|---------------|
| 5/16" | LN78135P | 0.531 | 0.157-0.276 | 0.202 | 0.309 | 0.307 | 0.147 | 0.630 | 2.205 | 0.728 |
| | LN78165P | 0.650 | 0.276-0.394 | | | | | | 2.244 | 0.846 |
| | LN78195P | 0.768 | 0.394-0.512 | | | | | | 2.362 | 0.965 |
| | LN78225P | 0.886 | 0.512-0.630 | | | | | | 2.480 | 1.083 |
| | | | | | | | | | | |

| RIVET CODE | SHEAR STRENGTH,Lbs/kgf | | TENSILE STRENGTH, Lbs/kgf | |
|------------|------------------------|-----------|---------------------------|-----------|
| | min. | nom. | min. | nom. |
| LN78135P | 4300/1950 | 4520/2050 | 2646/1200 | 2867/1300 |
| LN78165P | 4631/2100 | 4851/2200 | | |
| LN78195P | | | | |
| LN78225P | | | | |

| | |
|-----------------------|--|
| BODY MATERIAL | STAINLESS STEEL AISI 304Cu WERKSTOFF No 1.4567 |
| MANDREL MATERIAL | STAINLESS STEEL AISI 304Cu WERKSTOFF No 1.4567 |
| RECOMMENDED HOLE SIZE | 0.315-0.327 inch |

ORNIT
BLIND RIVETS
Fastening Solutions

ORNIT BLIND RIVETS
Tel: +972 8 6610222, Fax: +972 8 6611380
www.ornit.com