

ORNILOCK


4.8 mm with COUNTERSUNK head

M

Technical Data



K (COUNTERSUNK) HEAD
(STEEL/STEEL), POSITIVE LOCK
PULL MANDREL SELF PLUGGING

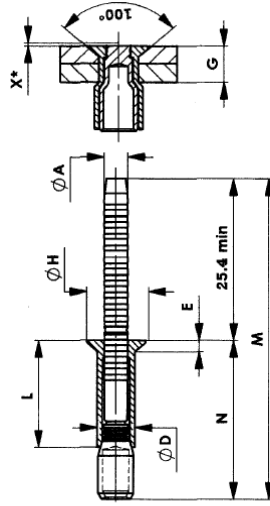

SIZE	RIVET CODE	RIVET LENGTH L, ±0.3	GRIP RANGE, G	Ø A ±0.07	Ø D +0.09 / -0.05	E ±0.3	X max	Ø H ±0.05	M ±0.2	BLIND SIDE PROTRUSION N max
4.8 mm	M48123 K	12.3	3.2-8.4	3.00	4.80	1.8	0.8	8.6	47	19.4
	M48165 K	16.5	7.8-12.7						51	23.6

RIVET CODE	SHEAR STRENGTH, N / kgf		TENSILE STRENGTH, N / kgf		MANDREL RETENTION, N / kgf	
	nom.		nom.		nom.	
M 48123 K	6180/630		5346/545		590/60	
M 48165 K						

BODY MATERIAL	LOW CARBON STEEL
MANDREL MATERIAL	MEDIUM CARBON STEEL
RIVET FINISH	ZINC COATED - Cr(VI) FREE PASSIVATION
MANDREL FINISH	ZINC COATED - Cr(VI) FREE PASSIVATION
RECOMMENDED HOLE SIZE	4.90-5.10 mm



ORNIT BLIND RIVETS

Tel: +972 8 6610222, Fax: +972 8 6611380

www.ornit.com