


U-FIX

UNN

STAINLESS STEEL/STAINLESS STEEL

Technical Data

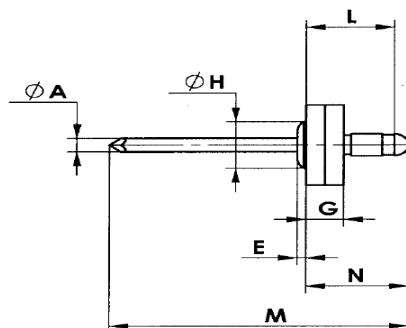

NOM. SIZE	ORNIT CODE	IDENTIFICATION	L LENGTH +0.016/-0.008	G GRIP min-max	M +/- 0.079	N max	A +/-0.001	D +/-0.004	E +/-0.004	H +/-0.01
	UNN48103D	UNN-DOME-0612	0.406	0.059-0.236	1.850	0.543	0.133	0.189	0.073	0.386
3/16"	UNN48127D	UNN-DOME-0616	0.500	0.098-295	2.047	0.638	0.133	0.189	0.073	0.386

RIVET BODY MATERIAL	STAINLESS STEEL - AISI 304
MANDREL MATERIAL	STAINLESS STEEL - AISI 434

RIVET SIZE	RECOMMENDED DRILL	RECOMMENDED HOLE SIZE	TYPICAL SHEAR STRENGTH, Lbs/kgf (Stem in shear plane)/ (Stem outside plane) (1456/660)/(882/400)	TYPICAL TENSILE STRENGTH, Lbs/kgf
3/16"	#11, 0.193	0.193 - 0.198		1125/510



Fastening Solutions

ORNIT BLIND RIVETS

Tel: +972 8 6610222, Fax: +972 8 6611380

www.ornit.com